


GENERAL DESCRIPTION:

Commercial shower system trim kit includes metal valve trim, wall supply (with 1/2" NPT female inlet and 1/2" NPSM male outlet), a 59" (1500 mm) metal shower hose, vacuum breaker, a 3-function hand shower with non-positive shut-off, 2-way diverter trim kit, fixed showerhead and a 36" slide-grab bar.

One-piece double ceramic pressure balance cartridge maintains a constant output temperature in response to changes in relative hot and cold supply pressure. Integral check valves prevent cross flow. Adjustable hot limit safety stop. Back-to-back capable. Durable valve trim with metal handle and escutcheon. 36" long combination slide bar / grab bar. 1-1/2" diameter stainless steel bar that meets ANSI standard 250 lb pull test. Chrome-plated hand shower holder with ADA compliant lever handle. 2.5 gpm/9.5 L/min.

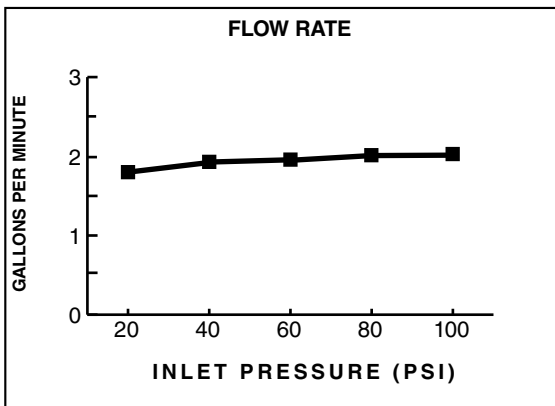

MODEL NUMBER:

□ TU662SG.223 Commercial Shower System Kit

Includes:

- Reliant3 Valve Only Trim TU385500WD **
- Includes Pressure Balance Cartridge
- 3-Function Hand Shower with non-positive shut-off 1660.767
- In-Line Vacuum Breaker 1660.400
- 59" Metal Hose 8888.035
- Wall Supply 8888.037
- Easy Clean Showerhead 8888.075
- Diverter Trim Kit T342.430
- 36" Slide Bar 1660.236

** Flash rough-in valve and 2-way diverter valve (R422) must be purchased separately

PRESSURE BALANCE CARTRIDGE:

One-Piece Cartridge: Simplifies installation and maintenance.

Double Ceramic Pressure Balance Cartridge:

Combination of ceramic disc mixing valve and a ceramic balancing spool.

Ceramic Disc Mixing Valve: Assures a lifetime of drip-free performance and smooth handle operation.

Ceramic Balancing Spool: Maintains a constant output temperature in response to changes in relative hot and cold supply pressure. Ceramic material is unaffected by mineral deposits and harsh water conditions.

Integrated Check Valves: Engineered to eliminate cross flow.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Comfort Zone: Offers a wider range to fine tune the desired temperature.

Back-to-Back Capability: Hot and cold can be reversed quickly and easily.

Trim Kit: Metal escutcheon with metal lever. Red / blue indicator ring.

PERSONAL SHOWER:

Water Saving: Saves 40% in water usage.

ADA-Compliant: Non-positive shut-off button on handle reduces flow to a trickle.

SLIDE-GRAB BAR:

Stronger Than Standard Slide Bars: 1-1/2" diameter S.S. bar meets ANSI standard 250 lb. pull test. Chrome-plated hand shower holder with ADA compliant lever handle.

SUGGESTED SPECIFICATION

Commercial shower system trim kit shall feature metal valve trim, wall supply (with 1/2" NPT female inlet and 1/2" NPSM male outlet), 59" metal hose, vacuum breaker, 2.5 gpm/9.5 L/min. 3-function hand shower with non-positive shut-off, 2-way diverter trim kit, fixed showerhead and a 36" slide bar. Shall also feature one-piece double ceramic pressure balance cartridge. Fitting shall be American Standard Model # TU662.223.002.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ASSE 1016
- ASME A112.18.1016
- CSA B125.16
- ASME A112.18.1
- CSA B125.1

Product Number	Description	Finish
		Polished Chrome
		002

TU662SG.223	<p>Commercial Shower System Trim Kit. Contains double ceramic pressure balance cartridge, valve trim kit, 3-function water saving hand shower non-positive shut-off, metal hose, vacuum breaker, 2-way diverter trim kit, fixed showerhead, wall supply and 36" slide bar.</p> <p>2.5 gpm/9.5 L/min.</p> <p>** Flash rough-in valve and 2-way diverter valve (R422) must be purchased separately</p>
--------------------	---

