


Submitted Model No.:

Specific Features:



▲ Designate proper finish suffix

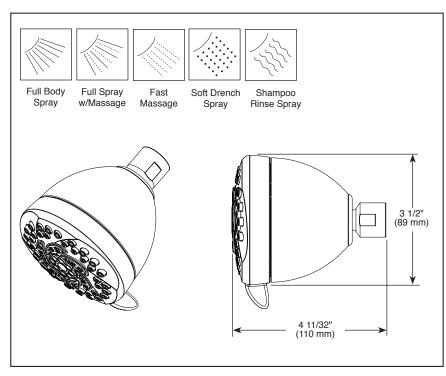

see what Delta can do

SHOWERHEAD

STANDARD SPECIFICATIONS

- Maximum 1.75 qpm at 80 psi, 6.6 L/min @ 550 kPa
- Standard 1/2" pipe fitting
- Five spray settings not a positve shut-off
- The brass ball joint swivel angle is 17° (8.5° per side)

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
 EPA WaterSense[®]