
## Specific Features:



#### Designate proper finish suffix

 Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

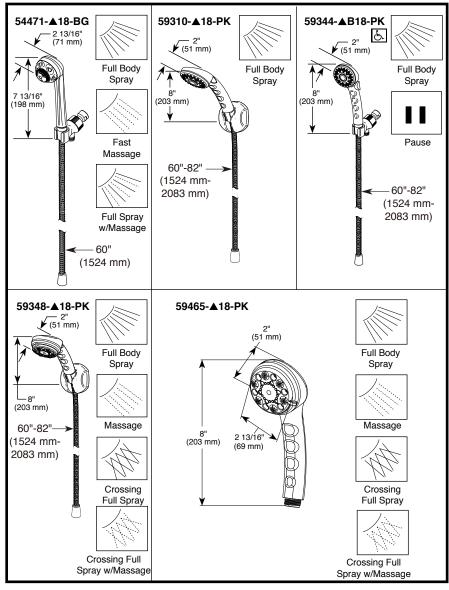

see what Delta can do

# PERSONAL HAND HELD SHOWERS

Certified Dual Check Valves Shower Arm or Wall Mount

# **STANDARD SPECIFICATIONS:**

- Handheld shower with one to four settings pause is a non-positive shut-off
- 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- 60" (1524 mm) stainless steel hose (54471-18-BG) 60"-82" (1524 mm - 2083 mm) stretchable metal hose:
- 59310-18-PK, 59344-B18-PK, 59348-18-PK Includes double check valves for backflow prevention
- Shower arm mount: 54471, 59344
- Wall mount: 59310, 59348
- Handhower only: 59465-18-PK
- ADA compliant handshower when installed per accessibility guidelines of the act (59344-18-PK only)

## WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



#### **COMPLIES WITH:**

■ ASME A112.18.1 / CSA B125.1 ◆ Indicates compliance to ICC/ANSI A117.1

EPA WaterSense®

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

Delta Faucet Company 55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2017 Delta Faucet Company