
3266 [65 gallons] Ĺ. FLORENCE 66 3/4" x 31" x 26 5/8"









Bathtub only

BATHTUB DRAIN ADAPTER

D-111 (123 Connect) is a floor drain adapter designed to facilitate the installation of freestanding bathtubs (must be installed before

Designed to be installed in a 8" to 10" joist space. Can be installed with a waterproofing membrane

Mass-Air FL03266F1M Included: 12 injectors, 750W (1 1/2h.p.) Optima blower, with 300W heating element, 72" blower hose extension, and remote control.



Rouge-Air FL03266F1A Included: 12 micro-jets, 750W (1 1/2h.p.) Optima blower, with 300W heating element, 72" blower hose extension, and remote control.





Overflow and waste included: Chrome Acrylic Colour: White Bathtub drain adapter (picture below)

Above-the-floor rough (AFR) Adjustable feet

Standard

Standard

Gel black neck pillow

White or brushed nickel overflow and drain kit

MASS-AIR / ROUGE-AIR OPTIONS

Mass-Air Jet finish: White/Chrome

Others: Chrome/Chrome

96" blower hose extension

A blower hose extension is required when the blower is located more than 4' from the bathtub.

LINEAR OVERFLOW







White

Brushed nickel

Chrome

Intertek

tiles are laid).

CONFORMITY ATTESTATION **Bathtub Standards** CAN / CSA.B45.5 Hydromassage Standard CAN / CSA.B45.10 / CSA.C22.2 / UL-1795




ECORESPONSABLE Certification First manufacturer of bathroom products in

North America to be certified ecoresponsible




6635, Picard street, Saint-Hyacinthe (Québec) J2S 1H3 Phone: (450) 773-7058 - Fax: (450) 773-5063 produitsneptune.com






FLORENCE 3266F1

Bathtub

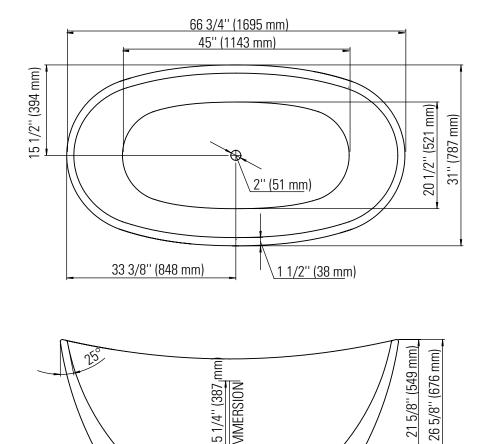

MMERSION

47 3/4" (1213 mm)



Ajustable feet

Above-the-floor rough (AFR)

*All dimensions are approximate and subject to change without notice Please refer to the installation guide before beginning the installation